

A

Case Docket No. PHN 16,982

THE COMMISSIONER OF PATENTS AND TRADEMARKS, Washington, D.C. 20231

Enclosed for filing is the patent application of Inventor(s):
JOSEPHUS J. BRAAT

For: DEVICE FOR SCANNING AN OPTICAL RECORD CARRIER

ENCLOSED ARE:

- ☒ Associate Power of Attorney;
- ☒ Information Disclosure Statement, Form PTO-1449 and copies of documents listed therein;
- ☐ Preliminary Amendment;
- ☒ Specification (13 Pages of Specification, Claims, & Abstract);
- ☒ Declaration and Power of Attorney:
(1 Page of a ☐ fully executed ☒ unsigned Declaration);
- ☒ Drawing (4 sheets of ☐ informal ☒ formal sheets);
- ☐ Certified copy of application Serial No. ;
- ☒ Other: AUTHORIZATION PURSUANT TO 37 CFR 1.136(a)(3);
- ☒ Other: CITATION OF RELATED CASES;
- ☐ Assignment to .

FEE COMPUTATION

CLAIMS AS FILED				
FOR	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE - 760.00
Total Claims	11 - 20 =	0	X \$18 =	0.00
Independent Claims	5 - 3 =	2	X \$78 =	156.00
Multiple Dependent Claims, if any			\$260 =	0.00
TOTAL FILING FEE			=	\$916.00

Please charge Deposit Account No. 14-1270 in the amount of the total filing fee indicated above, plus any deficiencies. The Commissioner is also hereby authorized to charge any other fees which may be required, except the issue fee, or credit any overpayment to Account No. 14-1270.

☐ Amend the specification by inserting before the first line the sentence: --This is a continuation-in-part of application Serial No. , filed .--.

CERTIFICATE OF EXPRESS MAILING

Express Mail Mailing Label No. EL215004790
Date of Deposit June 14, 1999
I hereby certify that this paper and/or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.
Steven Witte
Typed Name
Steven Witte
Signature

Michael E. Belk
Michael E. Belk, Reg. 33,357
Attorney
(914) 333-9643
U.S. Philips Corporation
580 White Plains Road
Tarrytown, New York 10591
MJ14BERO.SWO

Device for scanning an optical record carrier.

The invention relates to a device for scanning a surface comprising optically detectable marks along a scan line, which device comprises a radiation source for emitting a radiation beam, an objective system for guiding the radiation beam to the surface, a radiation-sensitive detection system for receiving radiation from the surface and an electronic circuit for processing output signals of the detection system.

The measurement of optical aberrations has recently become relevant in the field of optical recording, in particular the measurement of spherical aberration. The information density on optical record carriers may be increased by increasing the numerical aperture (NA) of the radiation beam used for reading and writing information on the record carrier. The record carriers are often scanned through a transparent layer protecting the information layer of the record carrier. A small variation of the thickness of the transparent layer causes a substantial change in the spherical aberration incurred by a high-numerical aperture radiation beam traversing the transparent layer. This spherical aberration may be reduced by using a dual lens objective system. Such a system has a first lens and a second lens, the second lens being a plano-convex lens arranged between the first and lens and the record carrier, and a small spacing between the plano surface and the record carrier. In some applications the plano-convex lens is referred to as a solid immersion lens.

The article "High density optical disk system using a new two-element lens and a thin substrate disk" by F. Maeda et al, published in the proceedings of ISOM96 p. 342-344 discloses an optical recording system having such a dual-lens objective system. The spherical aberration due to variations in the thickness of the transparent layer are compensated by changing the axial position of the plano-convex lens of the objective system. The system determines the spherical aberration in the beam reflected from the record carrier and uses this value to position the plano-convex lens. The spherical aberration is determined from the shape of the focus error signal as a function of the focus error. The axial position of the plano-convex lens is optimized to obtain the desired shape. The method has as a disadvantage that the shape of the focus error signal as a function of the focus position must be analysed, which requires wobbling the objective system through the point of best focus. During wobbling the reading and writing performance of the optical disk system is reduced.

It is an object of the invention to provide an aberration detection system that does not have the above disadvantages. It is another object of the invention to provide a device forming a more accurate focus error signal.

This object is met by a device as described in the preamble, which device is
5 characterized according to the invention in that the detection system comprises a plurality of detectors, each detector having an output for providing a detector signal, and in that the device comprises an electronic circuit for forming a time difference between corresponding parts of the detector signals relating to passage of the radiation beam over one of the marks and for
10 generating from the time difference a signal representing a wavefront aberration of the radiation beam.

The invention is based on the insight that different rays within the radiation beam will behave differently when the wavefront of the radiation beam deviates from the shape required for forming a proper focal spot on the surface. Such a deviation occurs when the beam is affected by optical aberrations. In particular, the position at which a ray is incident
15 on the surface or information layer depends on the position of the ray in the pupil of the beam. A ray which impinges on the information layer ahead of the central part of the focal spot will experience the presence of a mark in the layer earlier than the rays forming the central part of the focal spot. It turns out that a suitable division of the detection system in detectors allows measurement of the time difference between the rays coming from the surface. The different
20 detectors will determine different passage times for leading and trailing edges of the marks. A measurement of the time difference between the detector output signals of the occurrence of a particular feature of the surface, such as a leading or trailing edge of a mark, allows a determination of the primary optical aberrations.

The second object of the invention is met by a device as described in the
25 preamble, which device is characterized according to the invention in that the detection system comprises eight detectors arranged in four quadrants, each quadrant being split at a radius in an inner part and an outer part, each detector having an output for providing a detector signal, and in that the device comprises an electronic circuit for forming a time difference between corresponding parts of the detector signals relating to passage of the radiation beam over one
30 of the marks and for generating from the time difference a focus error signal.

Since the device measures time differences in the scan direction, the wavefront of the beam must deviate from spherical in a plane containing both the axis of the beam and the scan line in order to measure non-zero time differences. Defocus, spherical aberration and tangential coma are examples of wavefront deviations that can be measured when scanning

along the scan line. Other wavefront deviations, such as transverse coma, can be determined by the same method if the focal spot is wobbled in a direction transverse to the scan line and the detection system has a dividing line substantially parallel to the scan line. A measurement of the defocus in two directions allows the determination of the value of astigmatism.

5 The invention further relates to a method for determining the focus error and the optical aberrations from a time or phase measurement.

 The invention also relates to a record carrier having specific patterns of marks located at specified parts of the tracks.

10 It is remarked that US patent no. 4,051,527 describes a device that measures time differences between output signals of detectors and uses these differences to form a signal indicative of the distance between the centre of the focal spot and the track to be followed. In contrast to the present invention, the signal of the known device is relatively insensitive to wavefront deviations of the radiation beam.

15 The invention will now be described by way of example and with reference to the accompanying drawings, in which

 Figure 1A and 1B show a radiation beam affected by coma and spherical aberration, respectively, incident on a surface,

20 Figure 2 shows a device for scanning a surface according to the invention,

 Figure 3 shows a circuit for forming a focus error signal,

 Figure 4 shows a layout of a detection system, and

 Figures 5A and 5B show a record carrier according to the invention.

25 The principle of the aberration measurement will be explained with reference to Figures 1A and 1B. Figure 1A shows an unaberrated wavefront 1 of a radiation beam and a wavefront 2 aberrated by coma. Rays of the unaberrated wavefront, indicated in the Figure by drawn lines, intercept a surface 3 in point 4 when the radiation beam is properly focussed on the surface. Rays 5, 6, 7 and 8 of the comatic wavefront, indicated by dashed lines, intercept the surface at different points 9, 10, 10, 9, respectively, depending on the slope of the part of the wavefront pertaining to a ray. When the radiation beam moves over the surface along a scan-line from left to right in the Figure, a 'leading edge 11 and trailing 12 of a mark 13 in the form of a depression in the surface will be observed sooner by the rays intercepting surface 3

at point 9 than by the rays intercepting at point 10. When the different parts of the wavefront are intercepted by different detectors, the detectors will observe different passage times for a feature of the mark such as the leading or trailing edge. The passage times depend on the type of aberration of the radiation beam. Figure 1B shows a situation similar to the one of Figure 1A, wherein the radiation beam suffers from spherical aberration instead of coma.

Figure 2 shows a device for scanning a surface in the form of an optical record carrier 21, in which device the measurement method of aberration according to the invention has been implemented. The record carrier comprises a transparent layer 22, on one side of which an information layer 23 is arranged. The side of the information layer facing away from the transparent layer is protected from environmental influences by a protection layer 24. The side of the transparent layer facing the device is called the entrance face 25. The transparent layer 22 acts as a substrate for the record carrier by providing mechanical support for the information layer. Alternatively, the transparent layer may have the sole function of protecting the information layer and have a thickness in the range from 100 nm to 100 μ m, or the transparent layer may be absent altogether. In these cases the mechanical support function for the record carrier is taken over by protective layer 24 or by a further information layer and transparent layer connected to the information layer 23. Information may be stored in the information layer 23 of the record carrier in the form of optically detectable marks arranged in substantially parallel, concentric or spiral tracks, not indicated in the Figure. The marks may be in any optically readable form, e.g. in the form of pits, or areas with a reflection coefficient or a direction of magnetization different from their surroundings, or a combination of these forms.

The scanning device comprises a radiation source 26, for example a semi-conductor laser, emitting a diverging radiation beam 27. A beam splitter 28, for example a semi-transparent plate, reflects the radiation towards a lens system. The lens system comprises a collimator lens 29, and an objective system comprising a first lens 30 and a second lens 31. Collimator lens 29 changes the diverging radiation beam 27 to a collimated beam 32. First lens 30, having an optical axis 33, transforms collimated radiation beam 32 into a converging beam 34 incident on lens 31. Collimator lens 29 and first lens 30 may be combined into a single lens. Second lens 31 changes incident beam 34 into a converging beam 35, which comes to a focus spot 36 on information layer 23. Second lens 31 in the embodiment of the Figure is a plano-convex lens. Its planar surface faces transparent layer 22 and forms a gap between the lens and the layer. The planar surface may have an aspherical profile to compensate for optical aberrations. Although objective lens 30 is indicated in the Figure as a single lens element, it

may comprise more elements, and may also comprise a hologram operating in transmission or reflection, or a grating for coupling radiation out of a waveguide carrying the radiation beam. Radiation of converging beam 35 reflected by information layer 23 forms a reflected beam 37, which returns on the optical path of forward converging beam 34. First lens 30 and collimator lens 29 transform reflected beam 37 to a converging reflected beam 38, and beam splitter 28 separates the forward and reflected beams by transmitting at least part of reflected beam 38 towards a detection system 39. The detection system captures the radiation and converts it into one or more electrical detector signals 40. The detector signals are processed in an electronic circuit 41 in order to derive various signals from them. One of these signals is an information signal 42, the value of which represents the information read from the information layer 23. Another signal is a focus error signal, the value of which represents the axial difference in height between focus spot 36 and information layer 23. The focus error signal is used as input for a servo controller 43, which controls the positions of first lens 30 and/or second lens 31, thereby controlling the axial and transverse position of focus 36 spot such that it coincides substantially with the plane of information layer 23 and the centre of tracks on record carrier 21 to be followed by focus spot 36.

Beam splitter 28 may also be a grating, which passes in transmission radiation beam 27 from radiation source 26, and deflects part of reflected beam 38 towards detection system 39. In that case radiation source 26 and detection system 39 may be arranged close together on one side of the grating.

Detection system 39 is arranged in the far field of information layer 23, i.e. the detection system is located in a plane where the various diffraction orders of the beam from the information layer are sufficiently separated, in other words, in a plane which is disposed sufficiently far from the image of the information layer formed by objective system 30, 31 and collimator lens 29. Figure 2 shows a plan view of the detection system. The detection system comprises two concentric detectors split along a dividing line 50, giving two inner detectors 51, 52, and two outer detectors 53 and 54. The direction of the dividing line is perpendicular to the effective track direction. The effective track direction is the direction of the track currently being scanned on the record carrier as seen on the detection system through the optics between the detection system and the information layer comprising the track. The diameter of the inner detectors depends on the radius of the spot formed by radiation beam 38 on the detector surface. The diameter is preferably in a range from 50% to 80% of the spot diameter, and more preferably about 70%.

Figure 3 also shows part of electronic circuit 41 for deriving aberration signals from the detector signals. The detector signals are connected to an adder 55, giving an output signal representing the total radiation intensity incident on detection system 39, and thereby the information stored in the marks of the record carrier. A clock extractor 56, in the form of a phase-locked loop, derives a clock signal S_c from the output signal of adder 55. The clock signal is used in a circuit 57, which recovers the high-frequency or binary information signal S_i from the output signal of adder 55. Clock signal S_c is fed into timing units 58, 59, 60 and 61. Timing unit 58 determines the time difference t_a between a leading edge of a mark in the signal from detector 53 and the corresponding edge of the clock signal. Likewise, timing units 59, 60 and 61 determine the time differences t_b , t_c and t_d between a leading edge of the same mark in the signal from detectors 52, 53 and 54, respectively, and the same edge of the clock signal S_c . A circuit 62 combines the output signals of timing units 58 to 61 and forms a signal S_{ab} equal $t_a - t_b - t_c + t_d$, representing the spherical aberration in the radiation beam. A circuit 63 also combines the output signals of timing units 58 to 61 and forms a signal S_{co} equal $t_a - t_b + t_c - t_d$, representing the coma in the radiation beam. A circuit 64 forms a signal S_f from the output signals of timing circuits 58 to 61, which signal is equal to $t_a + t_b - t_c - t_d$, representing the focus error, i.e. the axial distance between focus spot 36 and information layer 23.

The output signals of circuit 41 may have a small offset, which can be compensated for in practice by tuning focus, spherical aberration and coma for minimum jitter in information signal S_i .

Circuit 10 may select particular patterns on the record carrier having advantageous properties. An example of a special pattern is one that is in phase with identical patterns in neighbouring tracks. The reading of such patterns is not affected by low-frequency cross-talk from the neighbouring tracks. The patterns are present in headers of sectors dividing the information layer in small storage units.

In another embodiment, circuit 10 selects patterns having marks with periods of approximately λ/NA and $3\lambda/NA$ from the spectrum of patterns obtained when reading information from the record carrier and use these patterns for the determination of the signals S_{ab} , S_{co} and S_f . However, in a preferred embodiment of the optical player the electronic circuit comprises a circuit 65, that establishes an enabling signal for timing units 58, 59, 60 and 61 from information signal S_i . The record carrier for this player comprises, at specified locations, two patterns of marks at two different spatial frequencies. Circuit 65 sends an enabling signal to the timer units when the radiation beam is at the specified locations. Circuits 62, 63 and 64 are modified each to form two differences of the outputs of the timing units, one for each of

the two patterns. A focus error signal at an output of circuit 64 is proportional to the difference signal of said two differences. This focus error signal is relatively independent of the type of the record carrier. Circuit 64 may be followed by a low-pass filter to remove the high-frequency components from the output signal before it is fed into servo circuit 43.

5 It will be clear that the focus error and aberration signals may also be formed by determining the time difference between each of the four outputs of detectors 51, 52, 53 and 54 and subsequently making the required combination of the time differences. Instead of through determination of time differences or delays, the focus error signal may also be obtained through measurement of phase differences between the detector signals and the clock
10 signal or between the detector signals themselves.

Figure 4 shows another embodiment 67 of the detection system. The detection system has two perpendicular dividing lines 68 and 69 and a circular dividing line 70. Dividing line 69 is parallel to the effective track direction. Alternatively, dividing line 69 may be rotated over 45°. The diameter of the circular line is similar to the one of detection system
15 39. The outer part of the detection system comprises four detectors 71 to 74, having detector signals a1 to d1. The inner part of the detection system comprises also four detectors 75 to 78, having detector signals a2 to d2. The time differences between the detector signals can be determined in the same way as for the detector signals in the embodiment shown in Figure 3. The signal S_{sa} , S_{co} , and S_f representing the spherical aberration, coma and defocus,
20 respectively, present in the radiation beam, are derived as

$$S_{sa} = (t_{a1} + t_{d1}) - (t_{a2} + t_{d2}) + (t_{b2} + t_{c2}) - (t_{b1} + t_{c1})$$

$$S_{co} = (t_{a1} + t_{d1}) - (t_{a2} + t_{d2}) - (t_{b2} + t_{c2}) + (t_{b1} + t_{c1})$$

$$S_f = (t_{a1} + t_{d1}) + (t_{a2} + t_{d2}) - (t_{b2} + t_{c2}) - (t_{b1} + t_{c1}),$$

where t_{a1} is the time difference between the detector signal a1 of detector 71 and the clock signal S_c . The slope of the delay in units of λ/NA , corresponding to signal S_{sa} , as a function of
30 the value of the spherical aberration in units of λ rms OPD in the radiation beam is approximately equal to $4/NA$. The focus error signal S_f derived according to the above equation is relatively insensitive to differences between record carriers of different type. A comparison of the time differences at two distinct spatial frequencies is not needed.

Since the device measures time differences in the scan direction, the wavefront of the beam must deviate from spherical in a plane containing both the axis of the beam and the scan line in order to measure non-zero time differences. Defocus, spherical aberration and tangential coma are examples of wavefront deviations that can be measured when scanning
 5 along the scan line. Other wavefront deviations, such as transverse coma, can be determined by the same method if the focal spot is wobbled in a direction transverse to the scan line and the detection system has a dividing line substantially parallel to the scan line. A radial wobble of the radiation beam may be effected by injecting a wobble signal in the part of servo circuit 43 controlling the radial servo. The detector signals should be connected to the timing units in
 10 a way corresponding to the different direction of motion. A measurement of the defocus in two directions allows the determination of the value of astigmatism

Figure 5A shows a top view of a record carrier according to the invention, which is particularly suitable for use by a device comprising an electronic circuit as shown in Figure 3. The tracks along which the device scans the information are circular or spiral. Only
 15 one track 26 is shown in the Figure. Figure 5B shows an enlargement of part of track 26. At fixed angular positions 27 each track comprises a pattern of marks having a spatial frequency in the range from 0.35 to 0.5 times the cut-off frequency of the objective system. At other locations 28 each track comprises a pattern of marks having a spatial frequency in the range from 0.14 to 0.2 times the cut-off frequency. The patterns preferably have a period of $3\lambda/NA$
 20 and $1\lambda/NA$. These positions are sensed by circuit 24 shown in Figure 10 and, subsequently, the patterns at these positions are used to derive a value of the focus error signal. To reduce the effects of cross-talk between neighbouring tracks on the determination of the focus error signal, the patterns in neighbouring tracks are preferably in phase. The patterns may form part of headers in which address information is stored. The patterns may form so-called VFO
 25 fields, i.e. fields used for generating a periodic signal to lock an oscillator to.

Since the capture range of the focus servo using the above focus error signal is relatively small, the device should preferably derive a focus error signal from the low-frequency components of the detector signals, which has a substantially larger capture range. When the focal spot is at a large distance from the information layer, the low-frequency-
 30 derived focus error signal is used, and close to the information layer, servo circuit 11 gradually switches over to the high-frequency derived focus error signal. European patent application no. 812 457 describes several ways to derive a focus error signal from the low-frequency components of the detector signals and implementations of the gradual switch-over.

The radial tracking error signal S_r may be derived in known ways. Preferred methods are the push-pull method, known from inter alia US patent no. 4,057,833, and the differential time detection method, disclosed in US patent no. 4,785,441.

09.04.99 10.44.30

CLAIMS:

1. A device for scanning a surface comprising optically detectable marks along a scan line, which device comprises a radiation source for emitting a radiation beam, an objective system for guiding the radiation beam to the surface, a radiation-sensitive detection system for receiving radiation from the surface and an electronic circuit for processing output signals of the detection system, characterized in that the detection system comprises a plurality of detectors, each detector having an output for providing a detector signal, and in that the device comprises an electronic circuit for forming a time difference between corresponding parts of the detector signals relating to passage of the radiation beam over one of the marks and for generating from the time difference a signal representing a wavefront aberration of the radiation beam.
2. Device according to Claim 1, the detection system comprises four consecutive sub-detectors a, b, c and d in the direction of the scan line, and the signal representing tangential coma is proportional to
- $$t(a-b) - t(c-d),$$
- where $t(n-m)$ is the time difference between detector signals of sub-detectors m and n.
3. Device according to Claim 1, the detection system comprises four consecutive sub-detectors a, b, c and d in the direction of the scan line, and the signal representing spherical aberration is proportional to
- $$t(a-b) + t(c-d),$$
- where $t(n-m)$ is the time difference between detector signals of sub-detectors m and n.
4. Device according to Claim 1, wherein the detectors are arranged at both sides of a dividing line, extending effectively in a direction perpendicular to the scan line.
5. Device according to Claim 1, wherein the detectors are arranged at both sides of a dividing line, extending effectively in a direction perpendicular to the scan line, and

comprising a servo circuit arranged for wobbling the position of the radiation beam in a direction perpendicular to the scan line.

6. Device according to Claim 1 arranged for scanning optical record carriers.

5

7. A device for scanning a surface comprising optically detectable marks along a scan line, which device comprises a radiation source for emitting a radiation beam, an objective system for guiding the radiation beam to the surface, a radiation-sensitive detection system for receiving radiation from the surface and an electronic circuit for processing output signals of the detection system, characterized in that the detection system comprises eight detectors arranged in four quadrants, each quadrant being split at a radius in an inner part and an outer part, each detector having an output for providing a detector signal, and in that the device comprises an electronic circuit for forming a time difference between corresponding parts of the detector signals relating to passage of the radiation beam over one of the marks and for generating from the time difference a focus error signal.

10

15

8. Device according to Claim 7, wherein the focus error signal is proportional to

$$(t_{a1} + t_{d1}) + (t_{a2} + t_{d2}) - (t_{b2} + t_{c2}) - (t_{b1} + t_{c1})$$

20

where t_e is a time difference between corresponding parts of detector signal e relating to passage of the radiation beam over one of the marks and a reference signal, the detector signals labelled '1' and '2' pertaining to detectors in the outer part and inner part, respectively of a quadrant, the detectors in four subsequent quadrants being labelled 'a', 'b', 'c' and 'd'.

25

9. A method for scanning a surface comprising optically detectable marks along a scan line, in which method a radiation beam is guided to the surface, and a radiation-sensitive detection system receives radiation from the surface, characterized in that the detection system comprises a plurality of detectors, each detector providing a detector signal, and in that a time difference is determined between corresponding parts of the detector signals relating to passage of the radiation beam over one of the marks and a signal representing a wavefront deviation of the radiation beam is formed from the time difference.

30

10. A method for scanning a surface comprising optically detectable marks along a scan line, in which method a radiation beam is guided to the surface, and a radiation-sensitive detection system receives radiation from the surface, characterized in that the detection system comprises eight detectors arranged in four quadrants, each quadrant being split at a radius in an inner part and an outer part, each detector providing a detector signal, and in that a time difference is determined between corresponding parts of the detector signals relating to passage of the radiation beam over one of the marks and a focus error signal is formed from the time difference.

11. An optical record carrier for being scanned by an optical system having a predetermined cut-off frequency and having an information layer in which information is stored in the form of optically readable marks arranged in tracks, characterised in that at predetermined parts along the tracks a first pattern of marks and a second pattern of marks are located, the first pattern having a spatial frequency in a range from 0.14 to 0.2 times the cut-off frequency and the second pattern having a spatial frequency in a range from 0.35 to 0.5 times the cut-off frequency.

09332212 06.14.98

ABSTRACT:

An optical scanning device scans a surface (23) provided with marks with a focused radiation beam (35) along a scan line. The device has a radiation-sensitive detection system (39) comprises a plurality of detectors. An electronic circuit (41) determines the time differences between corresponding parts of the detector signals relating to passage of the
5 radiation beam over one of the marks. The time differences are used to form a signal representing a primary wavefront aberration of the radiation beam.

Figure 3

64130 " 313360

1/4

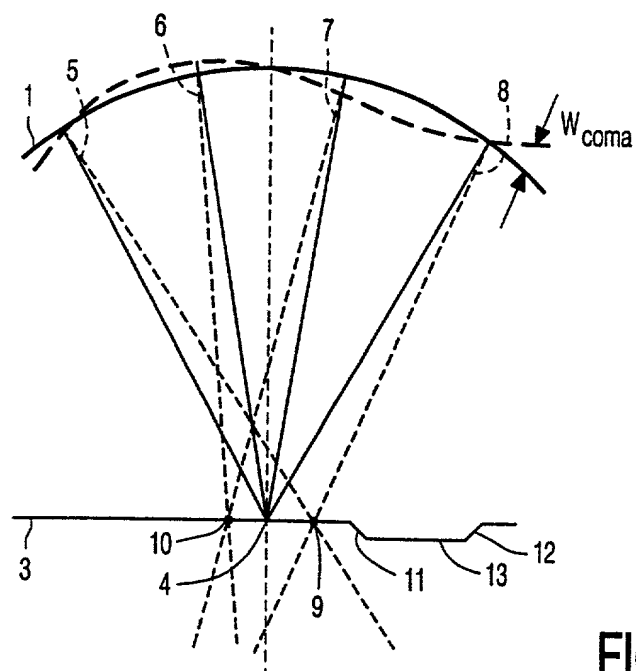


FIG. 1A

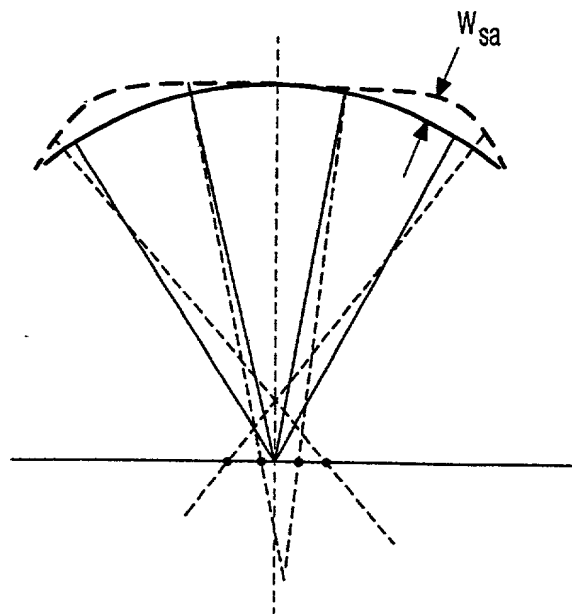


FIG. 1B

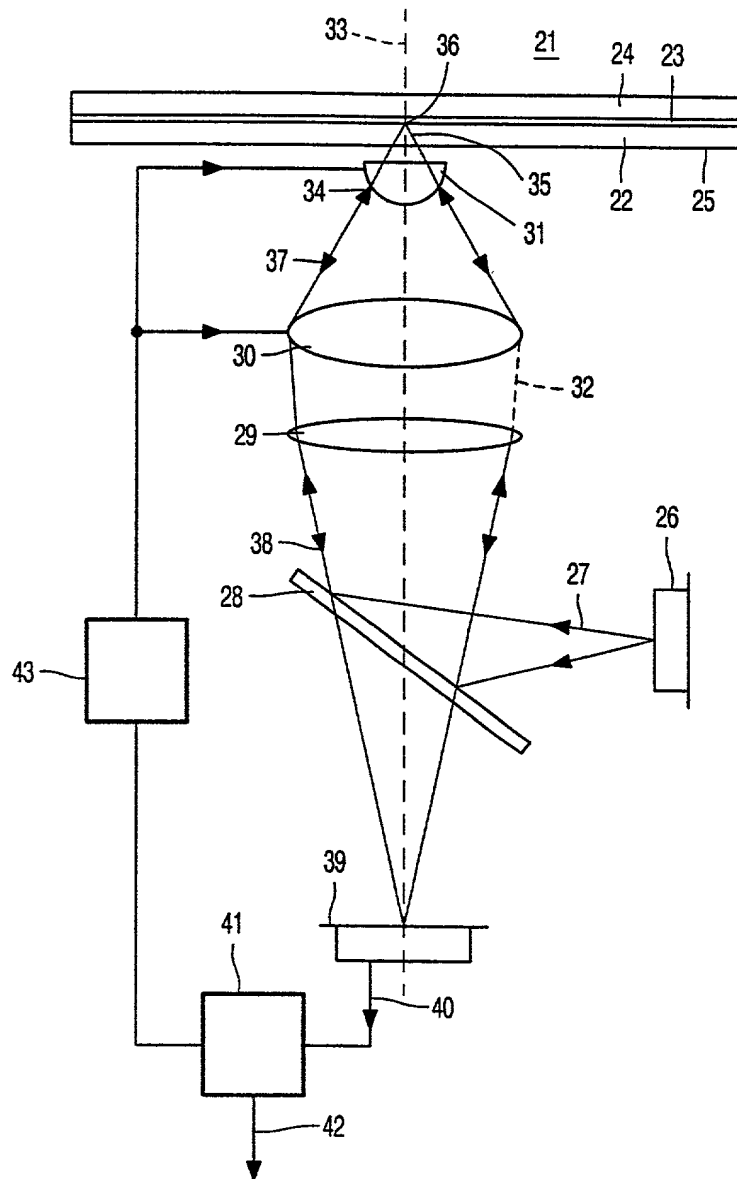


FIG. 2

3/4

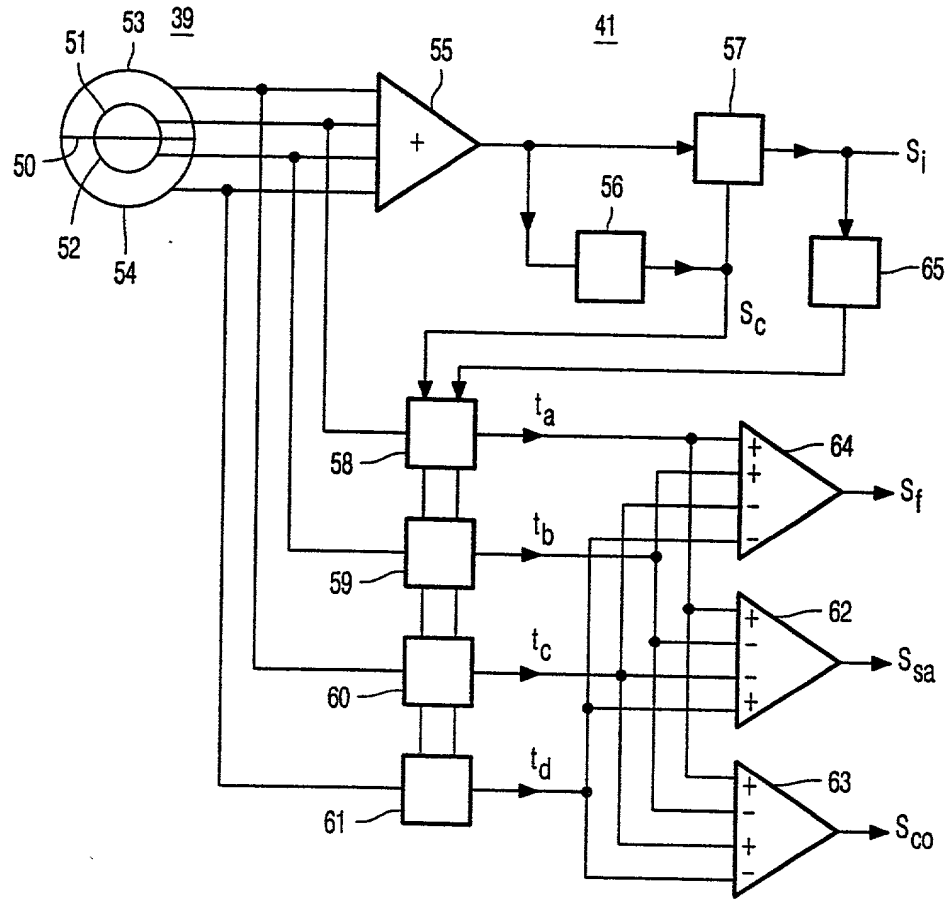


FIG. 3

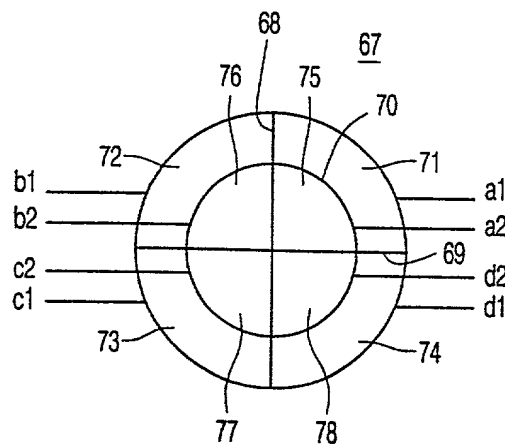


FIG. 4

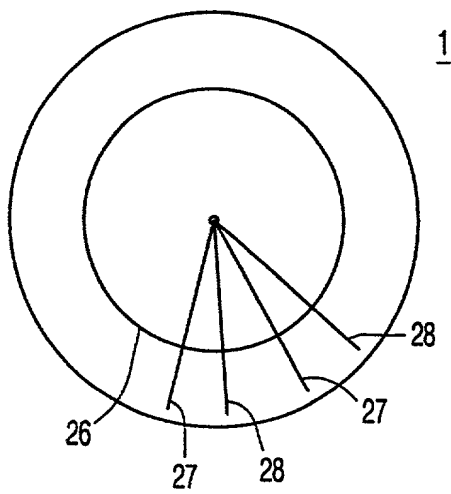


FIG. 5A

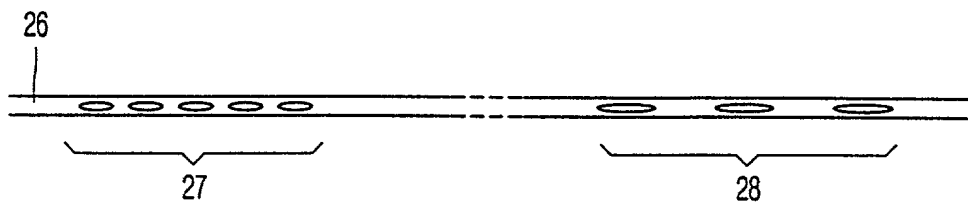


FIG. 5B

DECLARATION and POWER OF ATTORNEY

ATTORNEY'S DOCKET NO.:

PHN 16.982

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **"Device for scanning an optical record carrier"**

the specification of which (check one)

☐ is attached hereto.

☐ was filed on _____ as Application Serial No. _____ and was amended on _____ (if

applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by the amendment(s) referred to above.

I acknowledge the duty to disclose information which is material to patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APP. NUMBER	DATE OF FILING (DATE, MONTH, YEAR)	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Europe	98202015.8	16 June 1998	YES

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35 United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PRIOR UNITED STATES APPLICATION(S)

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (PATENTED, PENDING, ABANDONED)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Algy Tamoshunas, Reg. No. 27,677

Jack E. Haken, Reg. No. 26,902

SEND CORRESPONDENCE TO: Corporate Patent Counsel; U.S. Philips Corporation; 580 white Plains Road; Tarrytown, NY 10591	DIRECT TELEPHONE CALLS TO: (name and telephone No.) (914) 332-0222
--	--

Dated:		Inventor's Signature:		
Full Name of in Inventor	Last Name BRAAT	First Name Josephus	Middle Name J.M.	
Residence & Citizenship	City Eindhoven	State of Foreign Country The Netherlands	Country of Citizenship The Netherlands	
Post Office Address	Street Prof. Holstlaan 6	City 5656 AA Eindhoven	State of Country The Netherlands	Zip Code

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of

Atty. Docket

JOSEPHUS J. BRAAT

PHN 16,982

Serial No.

Group Art Unit

Filed: CONCURRENTLY

Ex.

DEVICE FOR SCANNING AN OPTICAL RECORD CARRIER
Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

APPOINTMENT OF ASSOCIATES

Sir:

The undersigned Attorney of Record hereby revokes all prior appointments (if any) of Associate Attorney(s) or Agent(s) in the above-captioned case and appoints:


MICHAEL E. BELK

(Registration No. 33,357)

c/o U.S. PHILIPS CORPORATION, Intellectual Property Department, 580 White Plains Road, Tarrytown, New York 10591, his Associate Attorney(s)/Agent(s) with all the usual powers to prosecute the above-identified application and any division or continuation thereof, to make alterations and amendments therein, and to transact all business in the Patent and Trademark Office connected therewith.

ALL CORRESPONDENCE CONCERNING THIS APPLICATION AND THE LETTERS PATENT WHEN GRANTED SHOULD BE ADDRESSED TO THE UNDERSIGNED ATTORNEY OF RECORD.

Respectfully,

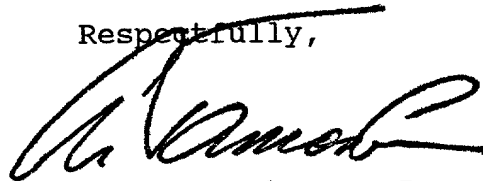

Algy Tamoshunas, Reg. 27,677
Attorney of Record

Dated at Tarrytown, New York
this 14TH day of JUNE, 1999.

664430" 2722220